


# Cord Operated Curtain Track System

# 3900



Cord Operated Curtain Track System 3900


## Specification

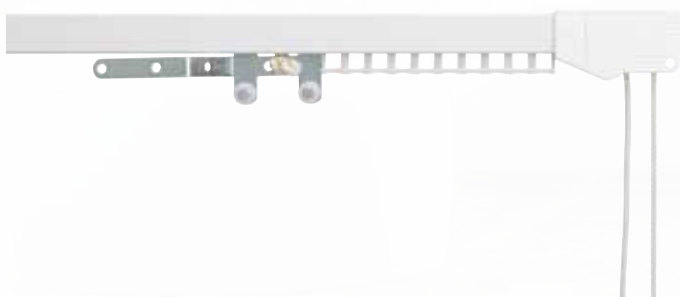


- Strong and elegant, the most attractive heavy duty track available
- Roller glider glides on rim of front channel - no dust and minimum friction
- Eye of glider is thrown forward to avoid friction with curtain heading yet remains in perfect balance
- Can be hand operated
- Can be front or reverse bent, perfect for bay windows
- Cord drop easily adjusted without dismantling system
- Can be bent

## Specification

### Profile, Bending and Specification Information




Standard radius 200 mm  
(Reverse bends 150 mm)

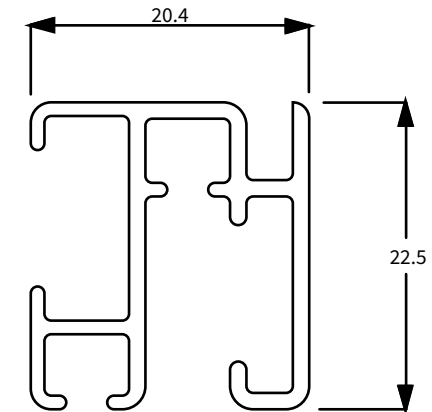

Silent Gliss 3900 cord operated aluminium curtain track, assembled complete with roller gliders at 10/metre gliding on front channel rim and eye section protruding forward to prevent friction. Cord-guide/return set, overlap arm and cord, (cord drop 150 cm R.H.S.). Face fixed with nylon bracket top fixed with nylon bracket at 600 mm centres.

## Suitable Headers

### Pencil Pleat

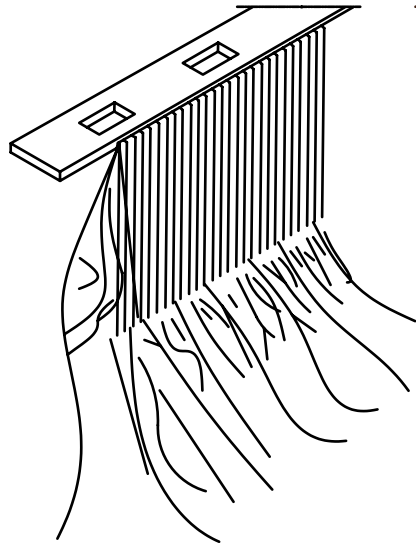

Pencil pleat curtains are a classic. Folds of fabric are tightly gathered to create a semi-cylindrical heading that resembles a line of pencils.

Pencil pleat curtains have a very traditional feel, so tend to fit in perfectly with more classic interior styles and in cottages or older properties. Pencil pleat curtains are very popular in living rooms, dining rooms and bedrooms.


#### Fullness

Minimum  
**200%**

Standard  
**250%**

Maximum  
**300%**

### Pinch Pleat

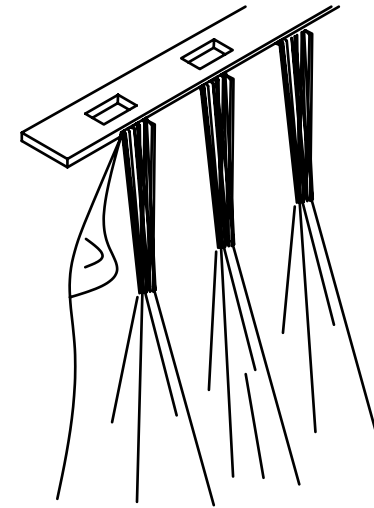

Pinch pleat draperies has been the most popular header style for decades due to their high insulation value as a result of the additional fabric within the treatment.

A pinch pleat drapery has an elegant look yet the formal style for a variety of fullness and can be used with most track systems. The drapery fullness is “pleated” into the drapery by creating a three layered fold that is stitched together approx. 10 mm below the “fingers”.

#### Fullness

Minimum  
**250%**

Standard  
**300%**


Maximum  
**350%**



Cord Operated Curtain Track System 3900

## Suitable Headers

### Inverted Box Pleat

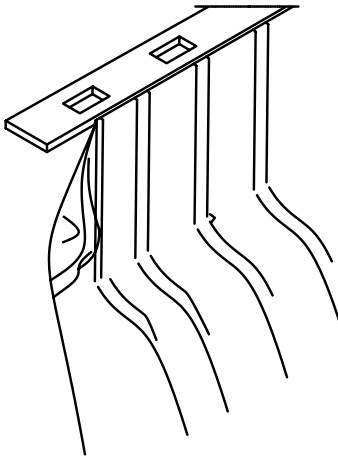

Inverted pleat curtains have a single pleat at the back, sometimes called a box pleat, placed at even intervals along the top. The overall look is beautiful and quite formal.

The header style brings a unique sense of style to the window. The width of the pleat is custom made and often uses more fabric than other header styles. For a more professional finish these headings can be made by hand. As the finished width is critical, but not easily adjusted we recommend that the width of the pleats and spaces are worked out before the curtains are made.

**Fullness**

**Minimum**  
**300%**

**Standard**  
**350%**



**Maximum**  
**400%**





# Fitting Information


## Ceiling fix with bracket

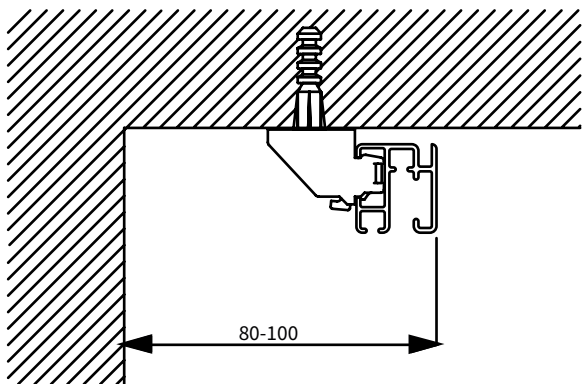


Top fix bracket

The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

## Bracket positioning and fixing with universal brackets


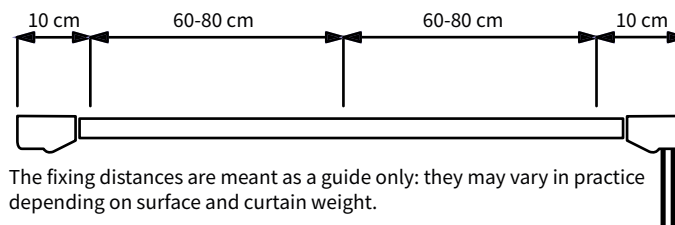


The fixing distances are meant as a guide only: they may vary in practice depending on surface and curtain weight.

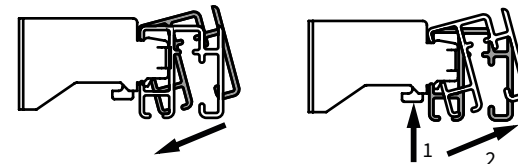


Installation: Roll track onto bracket in direction indicated  
Removal: 1. Press to release 2. Rotate forward for removal

## Ceiling fix with bracket and double arms

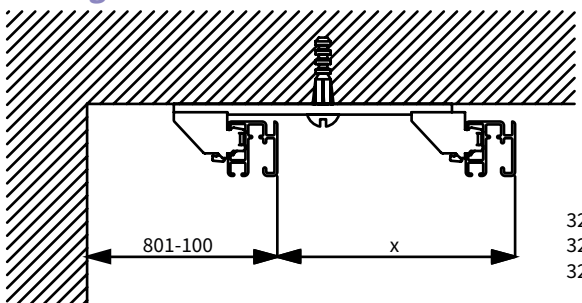

Bracket arm



Top fix bracket


X (mm)
3272
3273
3274

Double arm features thread for screw M4x8 for fixing the bracket




# Wall Fixing


## Wall fix with universal brackets

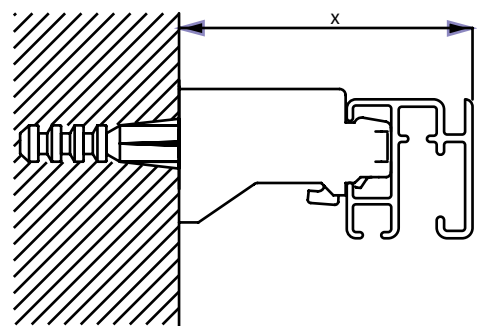


X (mm)
3630
3655
3660



Bracket




Long universal bracket




Extra long universal bracket


## Wall fitting with Smart Fix 1 and bracket 3

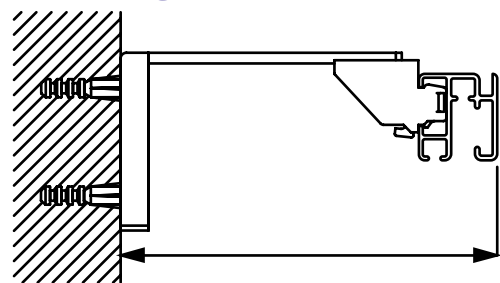

X (mm)
11200
11201
11202
11203
11204
11205




Smart Fix (60-200 mm)




Top fix bracket



## Suspended fix with bracket and hanger rod system




X (mm)
3639
1.25 max.



Hanger assembly (complete)



Top fix bracket




Bracket for return profile




# Fitting Options

## Ceiling fix with clamp

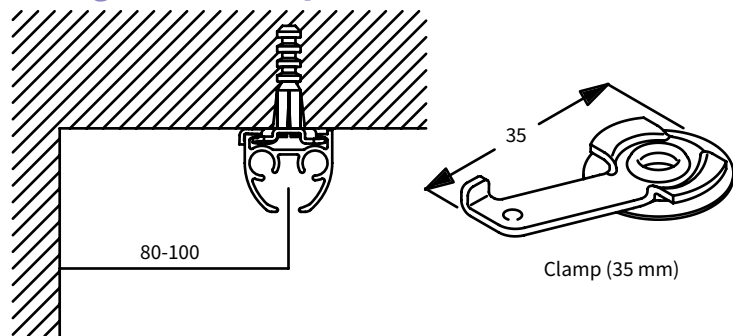


Min. distance from wall when using Wave XL: 220 mm.

## Ceiling fix with clamp

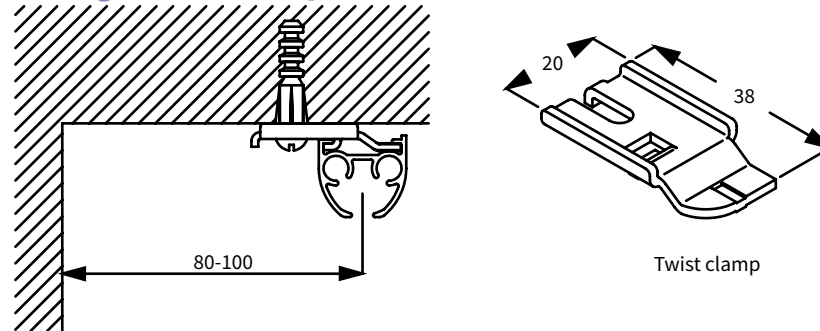


Min. distance from wall when using Wave XL: 220 mm.

## Ceiling fix with bracket

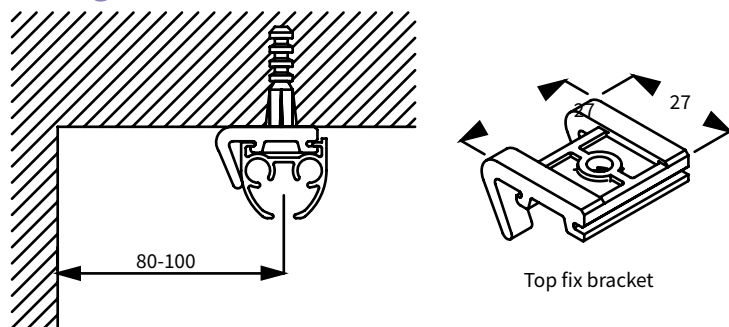

Min. distance from wall when using Wave XL: 220 mm.

## Wall fitting with Smart Fix and bracket

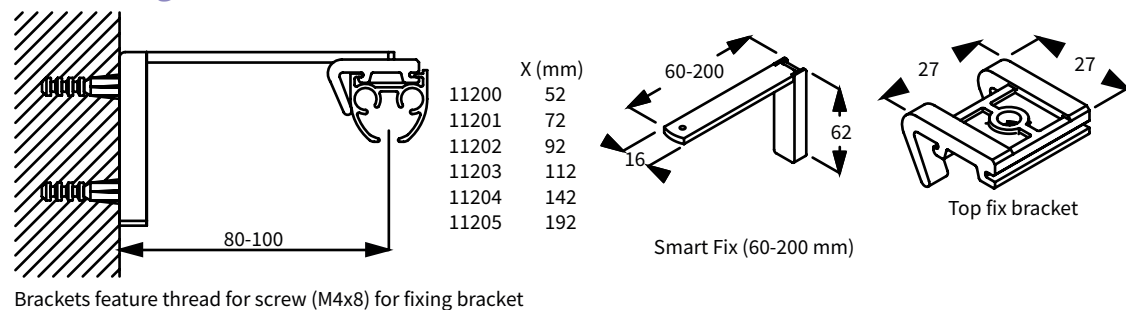

Brackets feature thread for screw (M4x8) for fixing bracket





Scan code to view on  
Smartphone or Tablet device

**UNITED KINGDOM**  
Euro Systems UK Ltd.  
Unit 11 Chancel Industrial park  
Newhall Street, Willenhall  
WV13 1NX  
UK

[info@eurosystems.co.uk](mailto:info@eurosystems.co.uk)  
[www.eurosystems.co.uk](http://www.eurosystems.co.uk)

Tel: +44 (0) 845 075 1050

 **Euro Systems®**  
*Design with Passion*

